

ENGINE MODEL VL 1716 C2**TECHNICAL DATA**

No. Cylinder & Arrangement	16V - 90°
Bore	170 mm
Stroke	185 mm
Total Displacement	67,2 l
Compression ratio	13,2
Valves per cylinder	2 intake 2 exhaust

PERFORMANCES**VL 1716 C2 MSD****Rated Power ICFN 2200 kW**

Speed	1930 rpm
B.M.E.P.	20,4 bar
Emissions compliance	IMO MARPOL Tier II / EPA Tier II Without After Treatment System
Mean piston speed	11,90 m/s
Idle speed	700 rpm

VL 1716 C2 MLL**Rated Power ICFN 2000 kW**

Speed	1890 rpm
B.M.E.P.	18,9 bar
Emissions compliance	IMO MARPOL Tier II / EPA Tier II Without After Treatment System
Mean piston speed	11,65 m/s
Idle speed	700 rpm

VL 1716 C2 MLH**Rated Power ICFN 1800 kW**

Speed	1800 rpm
B.M.E.P.	17,9 bar
Emissions compliance	IMO MARPOL Tier II / EPA Tier II Without After Treatment System
Mean piston speed	11,10 m/s
Idle speed	700 rpm

AMBIENT REFERENCE CONDITIONS

According to Marine Classification
Societies requirements
(ISO 3046/1 for unrestricted navigation)

Ambient temperature	45° C
Sea water temperature	32° C
Barometric pressure	1000 mbar
Relative humidity	60%

Rated power available without any derating up to:

Ambient temperature	55° C
Sea water temperature	36° C
Relative humidity	100%




Isotta Fraschini Motori
a **FINCANTIERI** company

the added value to your project

VL 1716 C2

MARINE DIESEL ENGINE

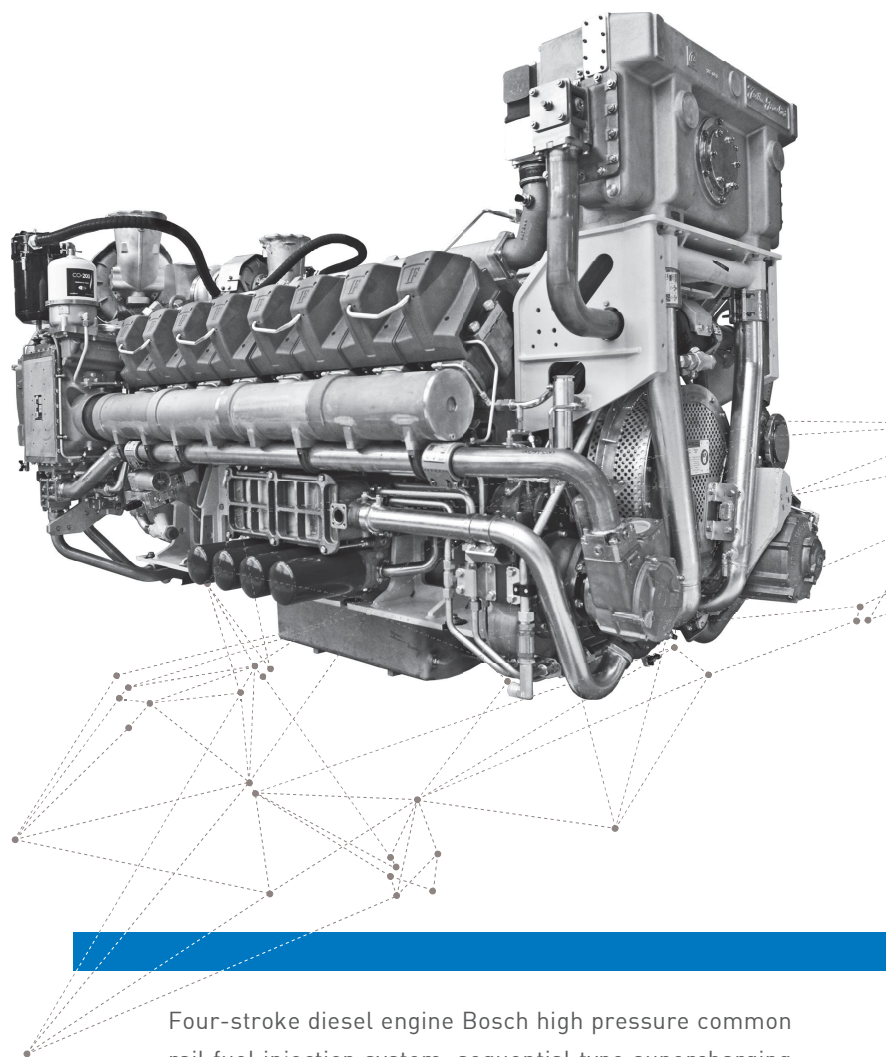


Four-stroke diesel engine Bosch high pressure common rail fuel injection system, sequential type supercharging system with exhaust gas operated turbochargers and tube-type sea water/charge air intercoolers, engine cooling system with fresh water/sea water plate type heat exchanger with integrated header tank and thermostatic control, thermal insulated exhaust gas manifolds.

Single cylinder heads with 4 valve technology; efficient combustion with low fuel consumption; outstanding low end torque for excellent acceleration and reliable high output power, in all operating conditions.

Engine with exclusive power to weight ratio.


PERFORMANCE DIAGRAM

VL 1716 C2 ENGINE

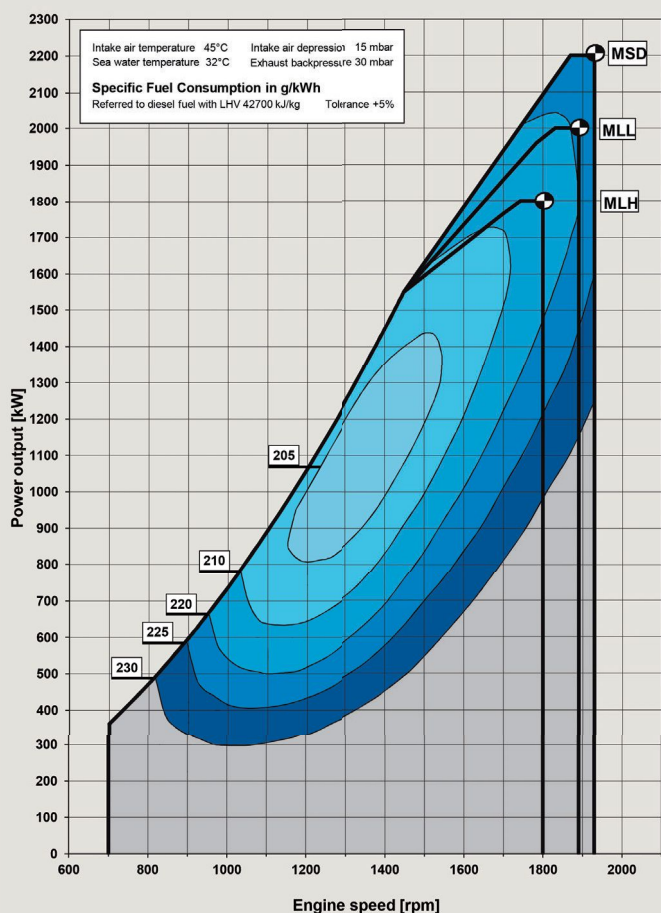

NOTE: Engines Power in reference to ISO 3046 -1

VL 1716 C2 MARINE DIESEL ENGINE

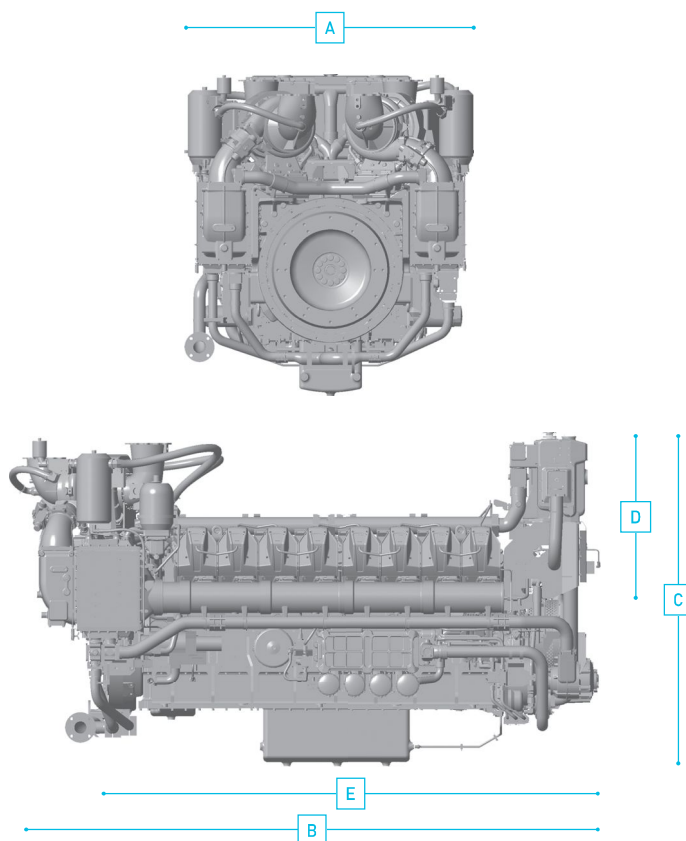

DIMENSIONS & WEIGHTS

A	Engine Width	1630 mm	E	Length at Flywheel	2935 mm
B	Engine Length	3475 mm	F	Engine Dry mass	7700 Kg
C	Engine Height	1860 mm	I	Flywheel and Housing size	SAE 21 SAE 00
D	Height at Engine shaft	1230 mm			

BASIC ENGINE BUILD STANDARD

- Engine cooling circuits with engine-driven centrifugal pumps (sea water pump of self-priming type)
- Forced engine lubrication by engine-driven gear type pump, plate-type oil/ fresh water cooler unit, cartridge type oil filter unit
- Fuel system complete with BOSCH High Pressure pump with feeding pump
- Duplex fuel filter, cartridge replaceable whilst running
- Electric system provided with terminal box
- Electric starting motor (24V, 2 x 15 kW)
- Alternator for battery charging (28V, 175A)
- Exhaust gas bellows
- Intake air bellows
- Flexible mountings
- Electric pre-lubrication pump
- Shielded High Pressure Injection pipes
- Torsional vibration damper
- Local Control Panel (LCP)
- Standard tools
- Operating and maintenance manual (commercial type)
- Illustrated spare parts catalogue (commercial type)

PRESSURE SENSORS:

- Charge air pressure
- Lube oil pressure
- Fresh waterpressure
- Sea water pressure
- Fuel oil pressure

TEMPERATURE SENSORS:

- Charge air temperature
- Fresh water temperature
- Lube oil temperature
- Fuel oil temperature
- Exhaust gas temperature

NOTE

All technical data are subject to variation without notice.
To be used only as indicative.
To be confirmed with a purchase order.

OPTIONAL ITEMS

- Overspeed engine stopping device
- Marine painting
- Fresh water pre-heating system with thermostat system
- Lube oil pre-heating system with thermostat system
- Remote Control Panel-Dashboard
- Throttles kit
- Reverse & reduction gear box (torsional coupling included)
- Cardan shaft
- Classification society test certificate
- Torsional vibration analysis calculation (TVC)
- Long storage preservation treatment
- Pneumatic starting system
- Intake air dry type filters
- Bilge Pump
- Turning gear



Isotta Fraschini Motori
a FINCANTIERI company

isottafraschini@isottafraschini.it - www.isottafraschini.it

